





BONDAI

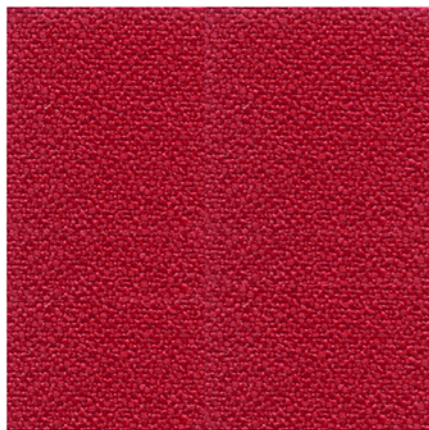


4017




4007




4011



4004



3012



3005




2036




1008




1005




5004




5096




6006




6071




6003




7032




7021




8078




8010




6016




6098



6015



7048



7008

inloom

BONDAI

Specification

SPECIFICATION	STANDARD	TOLERANCE	ACHEIVED
COMPOSITION	100% POLYESTER		
ENVIRONMENTAL	OEKO-TEX Standard 100		
ABRASION	ISO 12947-2 (Martindale)	± 10%	150,000
WIDTH (cm)	—	± 2%	140
WEIGHT (g/lm)	EN 12127	± 5%	350
PILLING (2000 rubs)	ISO 12945-2	from 4 to 5	5
LIGHT FASTNESS (blue scale)	ISO 105-B02 (Xoenotest)	from 5 to 8	6
FASTNESS TO RUBBING	ISO 105-X12 (Crockmeter)	from 4 to 5	4/5 (grey scale)

Slight colour variation within commercial tolerance may occur between batches due to properties of textiles


Digital fabric image may not be colour accurate. Always request fabric sample before ordering

FLAMMABILITY

EN 1021-1&2 Cigarette & Match
 BS 7176 Low Hazard
 BS 5852 Ignition source/ Crib 5
 BS 7176 Medium Hazard
 UNI 9175 Class 1 IM
 NF 92501-7 Class M1 with treatment if requested
 California TB117

Flammability performance is dependent upon the foam used

CLEANING AND WASHING



inloom
fabrics