Monitor Arms
for DeskRite 100 sit-stand platform

❶

Retaining ring
(Single Arm) X1

Body(Mounted Post) X1

❷

Monitor Adapter(Single Arm) X1
Monitor Adapter(Dual Arms) X2

❸

Parallel dual arm connector X1   Rubber Ring X2

❹	❺	❻	❼	❽
M4X8mm Standard VESA Bracket Screws X8	M5X8mm Extended VESA Bracket Screws X8	5mm Stainless Steel Spacer X8	6mm Hex Key X1	4mm Hex Key X1

310mm
12 inches

530mm
21 inches
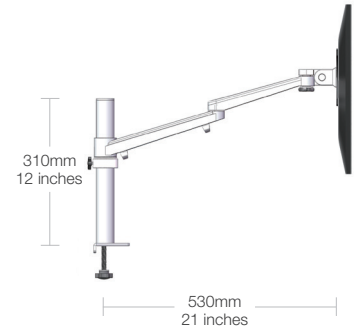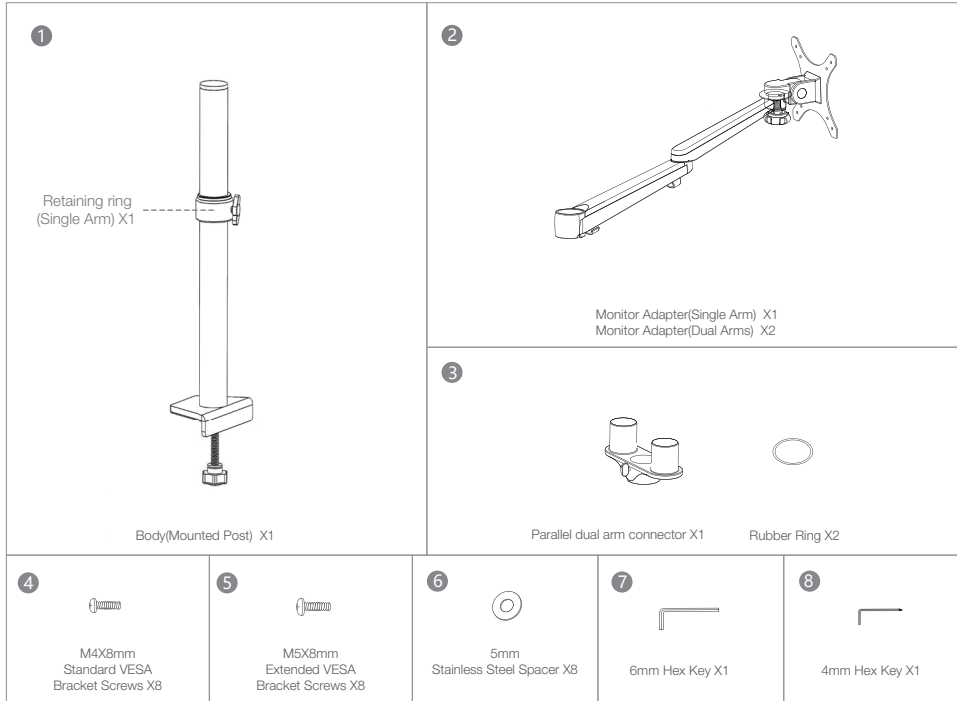
Screen
Max weight: 7kg/15lbs
Max size: 680mm/27inches

| 9820753	Monitor Arm - Single
9820754	Monitor Arm - Dual

Installation instructions

1 Remove the base screw from column.

2 Push the bolt up through the desktop and open cover.

3 Place the column (A) then tighten the bolt (B) underneath, secure the main column.

A
B

Posturite Ltd
The Mill, Berwick,
East Sussex, BN26 6SZ, UK
t. 0345 345 0010
e. support@posturite.co.uk

Posture Depot
179 Gasoline Alley
Mooresville, NC 2811, USA
t. 704-999-0809
e. info@posturedepot.com

POSTURITE
Because Health Matters

Posture Depot

Installation instructions
...continued

For Installation of Single Arm
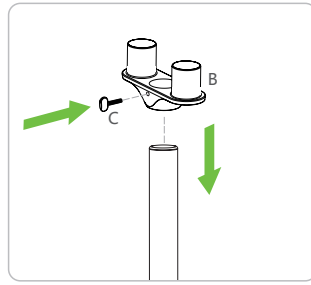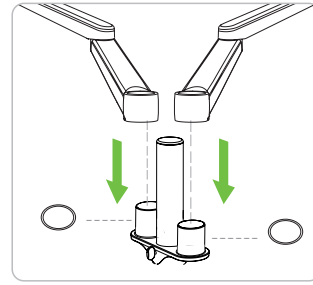
For Installation of Dual Arm

**4** Slide the retaining ring (A) onto the column, then insert the double section arm (B) onto upright column.

5 Insert the dual arm connector (B) into the post. Adjust the appropriate position then tighten the screw (C).

6 Slide the nylon washers onto the dual arm connector then position both arms onto connector.


7 Place VESA bracket in position on back of the monitor with lip facing up, attach using 4 screws provided.


8 After positioning at desired angle tighten frame with the 6mm hex key to prevent it from dropping.

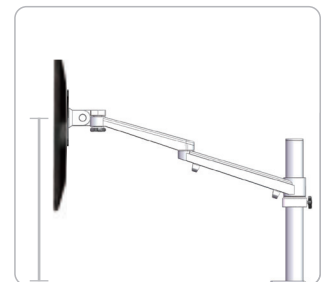**9** Tighten frame with a 4mm hex key to prevent it from dropping.

Tilt adjustment
+90˚ / -80˚

Level adjustment
180˚

Cantilever adjustment
360˚

Height adjustment
max 460mm
max 18 inches